


The ideal high-pressure washer series for surface cleaning. With a flushing performance of up to 40 L/min and an impact force of up to 270 bar, the dirt is optimally loosened and rinsed away in one operation. This saves time and money!



INCLUDING

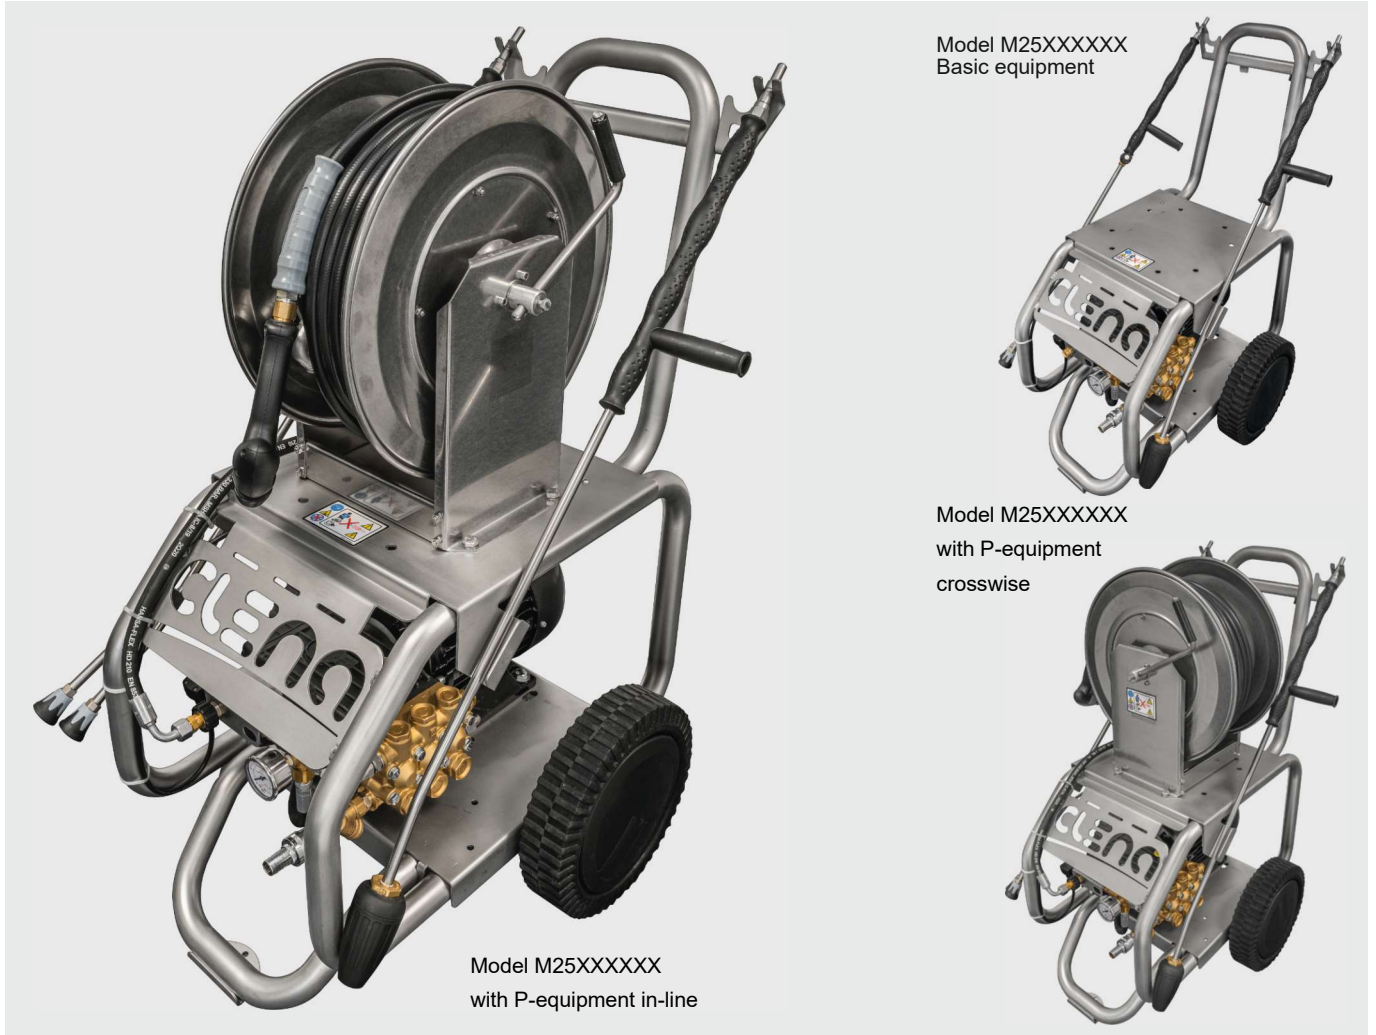

Standard accessory kit SWS:

- 10 m high-pressure hose DN10, kink protection on both sides
- High-pressure gun HDP350 with quick coupling and swivel joint in the inlet
- Double jet pipe made of stainless steel with high- and low-pressure nozzle

EQUIPMENT

- Stainless steel frame
- Powerful motors in many performance classes with long service life due to low speed (1,450/1,750 1/min)
- Triplex high-pressure pump with brass cylinder head, full ceramic pistons and stainless steel valves, oil-bath lubricated, low-noise and vibration-free
- Easy to handle due to strong tube diameter of 38 mm
- Ergonomically designed for good manoeuvrability
- optimised centre of gravity
- Chassis with rubber tyres and large wheel diameter of 300 mm
- Crane lifting points on the unit for safe lifting during transport
- Winding of the connecting cable in hand range
- Lance pick-up on left and right side of unit
- Water inlet temperature up to 60 °C (standard)
- Chemical suction on units up to 21 L/min at 200 bar as standard

**MODEL VARIATIONS**

Art.No.	Pressure bar	Flow rate L/min	Motor power kW	Nozzle	Foam Nozzle	Power supply	Dimensions L mm x W mm x H mm	Weight Kg approx.
M2515055	200	15	5.5	045	1.5	400 V, 3 phases, 50/60 Hz, optional up to 480 V, 10 m connection cable, 400 V plug 16 A	860 x 600 x 1100	65 to 80
M2518055	170	18	5.5	060	1.8			
M2521055	150	21	5.5	075	1.8			
M2515065	240	15	6.5	045	1.5	400 V, 3 phases, 50/60 Hz, optional up to 480 V, 10 m connection cable, 400 V plug 16 A	860 x 600 x 1100	65 to 80
M2518065	200	18	6.5	055	1.8			
M2521065	170	21	6.5	070	1.8			
M2525065	150	25	6.5	090	2.1			
M2515075	270	15	7.5	035	1.25	400 V, 3 phases, 50/60 Hz, optional up to 480 V, 10 m connection cable, 400 V plug 32 A	860 x 600 x 1100	65 to 80
M2521075	200	21	7.5	065	1.8			
M2525075	170	25	7.5	080	2.1			
M2530075	150	30	7.5	100	-			
M2535075	120	35	7.5	140	-			
M2540075	100	40	7.5	180	-			

EQUIPMENT OPTIONS (ONLY IN CONNECTION WITH UNIT ORDER)

Option	Art.No.
P-equipment option, consisting of: <ul style="list-style-type: none"> · Hose reel made of stainless steel, mounted in-line or crosswise. · 30 m high-pressure hose set · High-pressure gun HDP350 · Double jet pipe type O 1000 mm with high and low pressure nozzle · Turbo nozzle jet pipe with turbo nozzle · Weight 70 kg 	(Please specify nozzle size when ordering) in-line mounted - CLAO0151/... crosswisely mounted - CLAO0151/...Q
Automatic start-stop Timer-controlled adjustable from 0 seconds to 30 seconds	
· Flow-controlled The high-pressure washer is only switched on when the water flow rate exceeds 1.5 L/min.	M25XXXXXV3.0002
· Pressure-controlled For self-priming machines	M25XXXXXV3.0003
High-pressure washer frame epoxy coated in RAL colour	CLAO0035
Attachment kit water inlet filter 5" with sand filter insert Up to an engine power of 6.5 kW	CLAO0074
Hot water pump kit For water inlet temperatures up to 80 °C	CLAO0090
Thermal valve To protect the high-pressure pump, opens at water temperatures above 60 °C, with outlet to the outside	CLAO0081